

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number
WO 03/056679 A1

(51) International Patent Classification⁷: **H02H 7/26**

(21) International Application Number: PCT/EP02/14889

(22) International Filing Date:
27 December 2002 (27.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01205188.4 31 December 2001 (31.12.2001) EP

(71) Applicant (for all designated States except US): **ABB T & D TECHNOLOGY LTD.** [CH/CH]; Affolternstrasse 44, P.O. Box 8131, CH-8050 Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DI MAIO, Luciano** [IT/IT]; Via Gerolamo Organini, 10, I-20162 Milano (IT). **KRUMM, Ralf** [DE/DE]; Skellstrasse, 250, 68723

Schwetzingen (DE). **ANDENNA, Andrea** [IT/IT]; Via Isolabella, 6, I-26021 Annico (IT). **GATELLI, Fabio** [IT/IT]; Via Foppa, 43, I-25021 Bagnolo-Mella (IT). **CRESPI, Andea** [IT/IT]; Via G. Da Cardano, 3, I-21013 Gallarate (IT).


(74) Agent: **GIAVARINI, Francesco**; Giavarini E Associati S.r.l., Viale Bianca Maria, 35, I-20122 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,

[Continued on next page]

(54) Title: HIGH SPEED TRANSFER SYSTEM

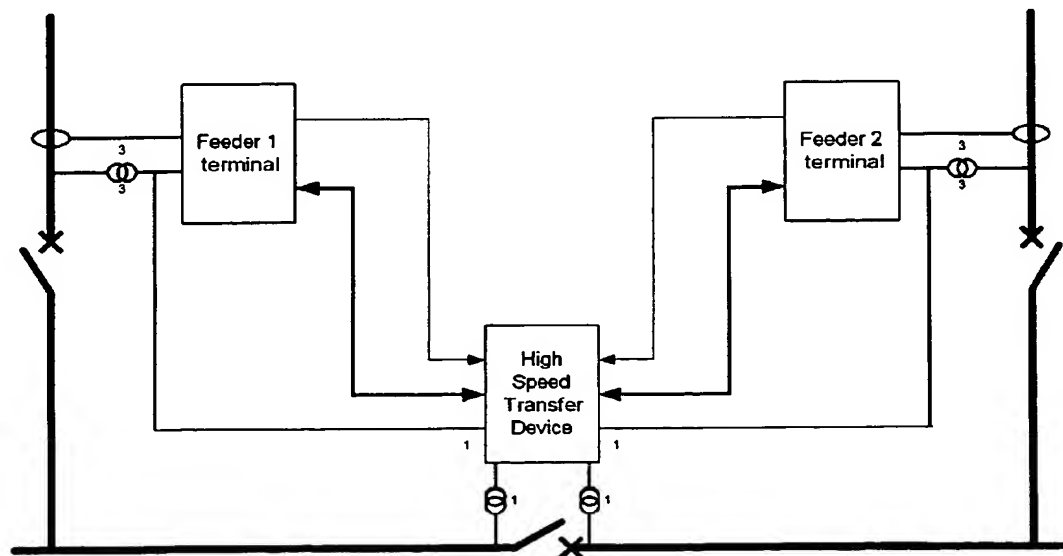

—→ Communication through optical ports
- - -→ Communication through binary I/Os

(57) Abstract: A High Speed Transfer System which comprises three Protection and Control devices. A first and a second of said Protection and Control devices are used for failure detection on the feeder bus-bar; the third of said Protection and Control devices is used for the High Speed Transfer System co-ordination functionalities.



TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HIGH SPEED TRANSFER SYSTEM

DESCRIPTION

The present invention relates to a high speed transfer system for Electrical Distribution, and, in particular, to a high speed transfer system for Protection &
5 Control of distribution networks.

The typical architecture of a High Speed Transfer System is showed in Fig. 3, in which a single device implements the High Speed Transfer System function.

In particular, specific devices protect the two feeders bus-bar by implementing specific protection functions.

10 In case of a failure on one feeder bus-bar, such devices send a trigger, via conventional input channels, to the High Speed Transfer System device which elaborates this information together with other information regarding the bus-bar voltages. As the voltages are such to act on the switchgear then the High Speed Transfer System device acts it.

15 This device is able to acquire the digital and analogic input signals by means of different electronic boards that have a DSP processor on them. Moreover it must process the entire High Speed Transfer System logic in order to send the right output to the switchgears.

In order to face the temporal constraints due to the characteristic electric system
20 transients, such a device is very powerful from the point of view of the hardware components.

In same cases it is possible to implement on such device even the protection functions. This is possible because the hardware allows to do that.

The High Speed Transfer System devices currently used have however some
25 disadvantages, which are highlighted below.

- The High Speed Transfer System devices currently used nowadays are usually very expensive because they need a great hardware power;
- The communication among this device and the protection devices is not very fast;

- The hardware and the software requirements of this device are not very efficient. To provide for this shortage, it is necessary to increase the power of the hardware components with a consequent cost increase;
- A device structured in such a way is not very flexible in terms of configuration for its customization. That means that the customer can modify its configuration only with difficulties, and only after it has been installed on the field.
- The High Speed Transfer System logic is moreover based on one function block execution cycle. There can be more than one cycles, with different priorities, but the architecture is anyway simply cyclic. This implies to improve the hardware performances to face the temporal constraints. Consequently the hardware complexity needs to be increased, with a corresponding increase of its costs.

The goal of the present invention consists in the realization of an improved High Speed Transfer System and devices.

This goal is achieved by realizing a new High Speed Transfer System in which three Protection and Control devices are used, instead of the single one described in the previous sections. Two of the three Protection and Control devices are used as protection of the feeder bus-bar and the third one for the switchgear co-ordination.

Moreover in this new system an efficient software High Speed Transfer System logic management is implemented, by splitting such logic into two parts: one is implemented with cycles and the other one by means of events, or asynchronous respect the cycle part.

The invention will be now described in details with reference to the enclosed figures 1, 2 and 4.

Referring to Figure 1 and Figure 2, it is possible to see the architecture of the three Protection and Control devices.

The two feeder Protection and Control devices acquire from the feeder bus-bar

the current and voltage measures in order to detect any possible failure on these bus-bar.

The same voltage measures are acquired also from the third Protection and Control device, which realizes the High Speed Transfer System co-ordination.

- 5 Such measures are necessary in order to identify the right instant time in which any switchgear operation must be carried out.

The two feeder Protection and Control devices communicate to the High Speed Transfer System device any possible failure, for instance via optical cable as communication media.

- 10 An additional digital communication channel is used for the service communication among the different devices.

The software architecture of the third Protection and Control device, i.e. the one realizing the High Speed Transfer System co-ordination, is structured in order to allow both the cyclic execution of specific tasks within their temporal

- 15 constraints and the quick re-action to external events.

Some of the advantages of this High Speed Transfer System according to the present invention are reported below:

- The entire system is certainly cheaper than the system currently used in the art, since in the system according to the present invention use is made of
20 three cheaper devices that do not require a great hardware power. In fact all the different High Speed Transfer System functionalities are distributed on the three devices, which communicate among them.
- The communication among the three devices, for the High Speed Transfer System scope, is very fast because optical cable can be used so to have a wide
25 band communication channel. This implies that the software has less temporal constraints because the acquired information from the High Speed Transfer System Protection and Control device are available sooner and consequently there is more time to process such informations.
- The hardware and software structure of these devices is very efficient.

The hardware structure is just able to perform the High Speed Transfer System proper working functionalities. In particular the software structure is very efficient. In fact it is structured in two parts: one of which is performed in software cycles while the other one is performed with events. This solution
5 allows to face the temporal constraints due to the electric transients.

– Finally the system according to the present invention is very flexible in terms of configuration and consequently in terms of customization. In fact the software is configurable in an easy way from the Human Machine Interface of each Protection and Control device, by implementating the specific functionality
10 on each of them.

A detailed description of the functionality is given in Figure 1 and in Figure 2.

Each of the feeder Protection and Control device acquires from the feeder bus-bar the current and voltage measures in order to detect any possible failure on these bus-bar. Such failure is detected by implementing specific protection
15 functions able to distinguish the direction of such a failure. In fact for failure of the electric loads the High Speed Transfer System does not have to intervene.

The same voltage measures are acquired also from the third Protection and Control device, which realizes the High Speed Transfer System co-ordination. Such measures are necessary in order to identify the right instant time in which
20 any switchgear operation must be carried out. This is carried out to reduce as much as possible any current and voltage overbump.

The High Speed Transfer System logic is different for the two cases represented in Fig. 1 and Fig. 2.

In the case represented in Figure 1, as a failure occurs on the active feeder bus-bar, the corresponding feeder Protection and Control device sends to the High
25 Speed Transfer System Protection and Control device a trigger signal, e.g. via an optical cable.

Such trigger signal is treated as an event from the High Speed Transfer System Protection and Control device, so it is instantaneously considered from the

software running on this device. The software processes such information in parallel to the rest of the High Speed Transfer System functionalities, so to manage in the most efficient way all the other High Speed Transfer System functionalities that must be carried out anyway.

- 5 As the right instant time for the switchgears operation occurs, then this device co-ordinates the opening of the switchgear on the feeder bus-bar on which the failure occurred and closes the other one so to guarantee the power feeder to the electric loads.

10 Then the High Speed Transfer System Protection and Control device send to the two feeder Protection and Control devices an information regarding the changed configuration of the electric system so to inform them about that. In this way these two devices can interpretate in the right way the changing of the current and voltage measures due to the closure and opening of the two switchgears.

15 In the case of Figure 2 both the feeder bus-bar are active until on one of them a failure occurs. Even in this case the regarding feeder Protection and Control device sends to the High Speed Transfer System Protection and Control device a trigger signal via the optical cable. Such trigger signal is treated as an event from the High Speed Transfer System Protection and Control device so it is instantaneously considered from the software running on this device. The
20 software processes such an information in parallel to the rest of the High Speed Transfer System functionalities so to manage in the most efficient way all the other High Speed Transfer System functionalities that must be carried out anyway.

25 As the right instant time for the switchgears operation occurs, then this device co-ordinates the opening of the switchgear on the feeder bus-bar on which the failure occurred and closes the switchgear on the bus-bar on which the whole electric loads are connected, so to guarantee the power feeder to those electric loads previously connected with the failed feeder bus-bar.

Then the High Speed Transfer System Protection and Control device sends to

the two feeder Protection and Control devices an information regarding the changed configuration of the electric system so to inform them about that. In this way these two devices can interpretate in the right way the changing of the current and voltage measures due to the closure and opening of the two
5 switchgear.

The difference between the two cases consists on the logic configured so to manage in the opportune way the three switchgears: the operation regard a couple of switchgears at a time.

Finally the digital communication via binary I/O is used to exchange service
10 information among the three devices such as current and voltage measures, start and trip protection information, etc.

With reference to the software architecture of the third Protection and Control device, i.e. the one realizing the High Speed Transfer System co-ordination, is structured in order to allow both the cyclic execution of specific tasks within
15 their temporal constraints, i.e. the High Speed Transfer System cyclic part, and the quick re-action to external events, i.e. the High Speed Transfer System event-driven part. These two types of processes are shown in Figure 4.

Both of them have to interact with data structures and external interfaces, e.g. the analog and digital I/O, the analog part of the High Speed Transfer System
20 algorithm.

High Speed Transfer System cyclic part containing part of the High Speed Transfer System logic, e.g. switchgears opening logic, has to be periodically executed within particular temporal constraints, for instance 10-15ms. In each cycle all the inputs are acquired, every function block, composing this part of
25 the High Speed Transfer System logic, is executed and then the outputs signal are actuated. It is very important that the time interval needed to complete a single cycle is less than a given maximum value in order to keep real time constraints.

High Speed Transfer System event-driven part contains all those part of the

High Speed Transfer System logic that can not be executed in the Cyclic part.
This can be:

– that part of High Speed Transfer System logic that must be executed in
correspondence of specific events, which need a fast re-action time, in particular
5 a re-action time less of the cyclic part. If this part of logic were implemented in
the cyclic part its time re-action constraint would not be met.

– that part of High Speed Transfer System logic that could be executed
as cyclic part but that would compromise the cyclic part time constraints.

In order to fulfill these requirements, a software architecture as shown in Figure
10 4 can be used.

Let's suppose that an external event happens. An interrupt service routine is
executed; it generates on its turn an operating system event in order to awake a
specific task able to manage this specific external event just happened. The
operating system scheduler then will execute this task depending on its priority
15 with respect to the other tasks.

Managing external events directly in the interrupt service routine (ISR) is not
feasible because in this case no different priorities could be assigned to event
managers. In this case all event managers would always have a priority higher
then the cyclic part one. This would compromise the time constraints of the
20 cyclic part.

For example, in case of "fast transfer trigger from High Speed Transfer System
analog part" external event, the priority of the corresponding event manager task
is higher than the cyclic part so that, in fact, this event interrupts the cyclic part.
In this case the event manager task is completely executed and then the cyclic
25 part execution is continued.

Instead in those cases in which the event manager has to be executed with a
priority lower than the cyclic part one, the event manger task is executed after
the end of the cyclic part.

CLAIMS

1. A High Speed Transfer System characterized by the fact of comprising three Protection and Control devices, a first and a second of said Protection and Control devices being used for failure detection on the feeder bus-bar, and the third of said Protection and Control devices being used for the High Speed Transfer System co-ordination functionalities.
5
2. A High Speed Transfer System according to Claim 1, characterized by the fact that said first and second Protection and Control devices communicate to the said third Protection and Control device via an optical cable as communication media.
10
3. A High Speed Transfer System according to Claim 2, characterized by the fact that an additional digital communication channel is used for the service communication among the different devices.
4. A High Speed Transfer System according to any of the previous claims, characterized by the fact that it has a software architecture structured in two parts: a first software part which is performed in software cycles and a second software part is performed with events.
15
5. A High Speed Transfer System according to Claim 4, characterized by the fact that said second software part is performed in a asynchronous way with respect to said first software part.
20
6. A High Speed Transfer System according to any of the previous claims, characterized by the fact that each of said first, second and third Protection and Control device comprises a Human Machine Interface.
7. An electrical distribution switchboard comprising a High Speed Transfer System according to any of the previous claims.
25

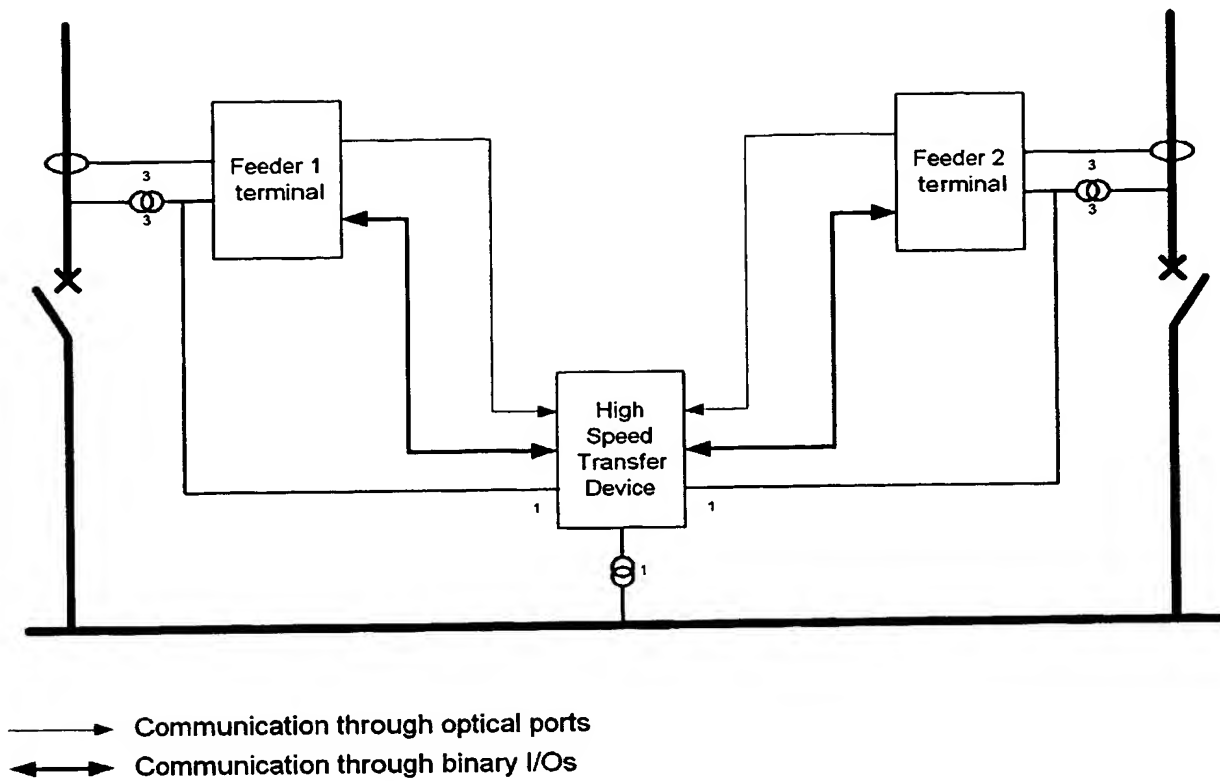


Figure 1

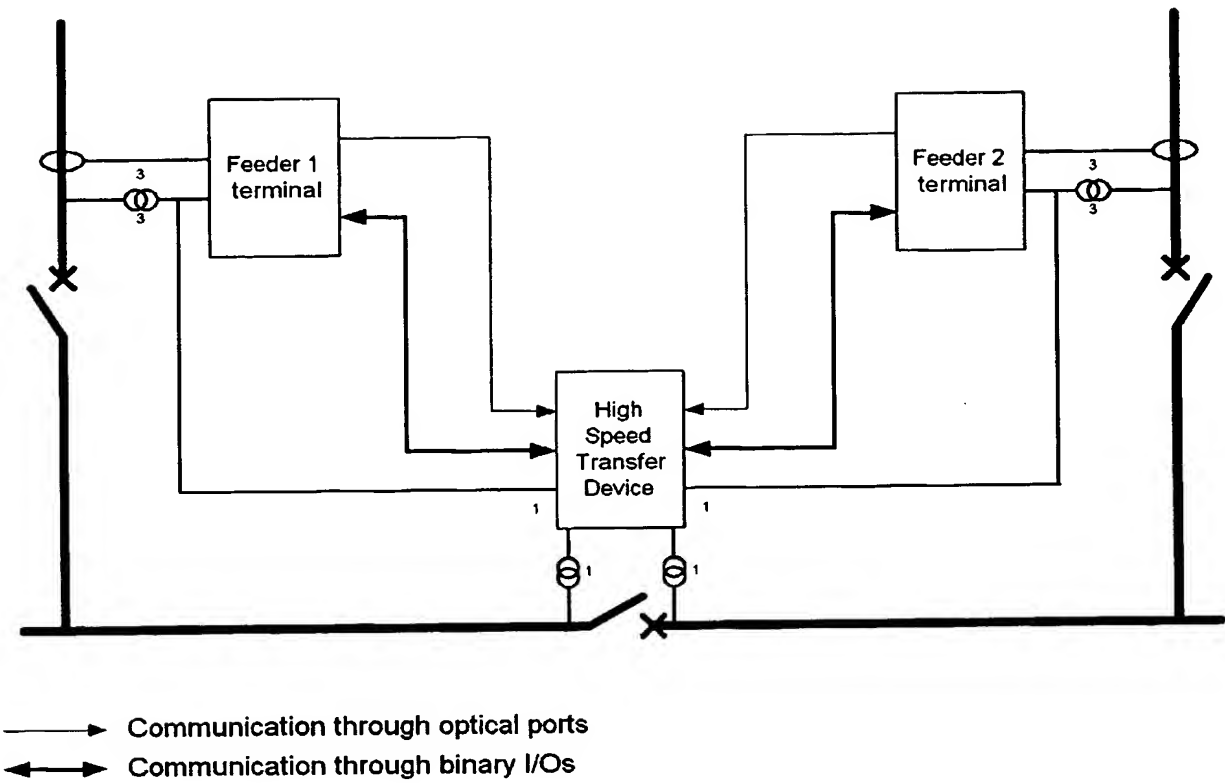


Figure 2

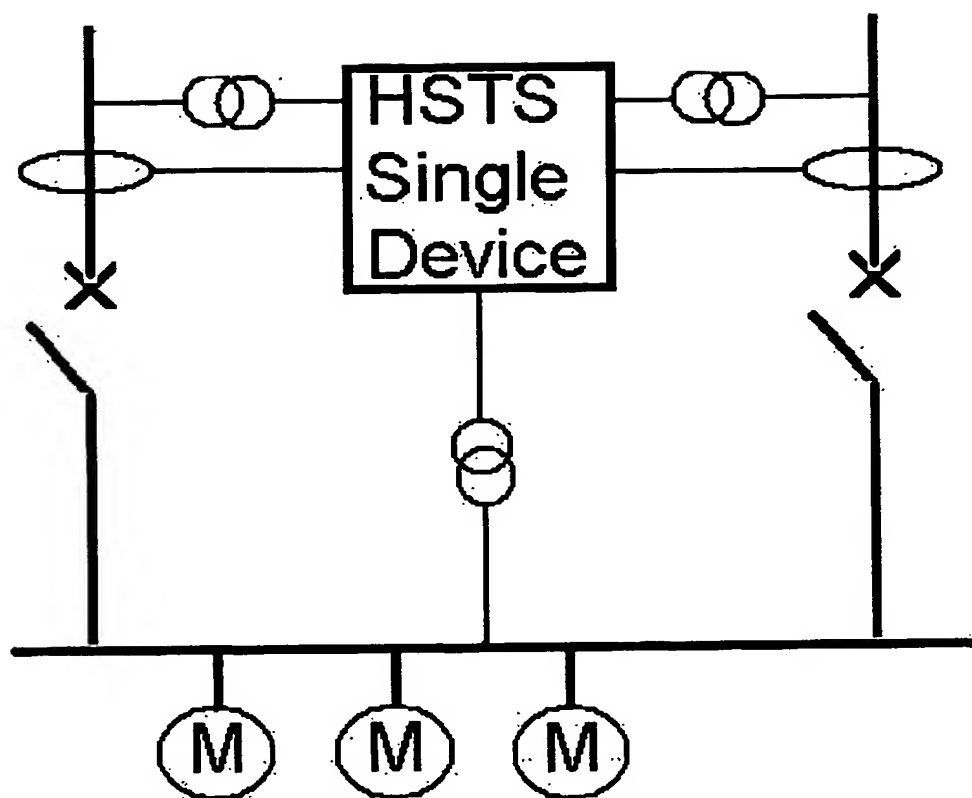


Figure 3

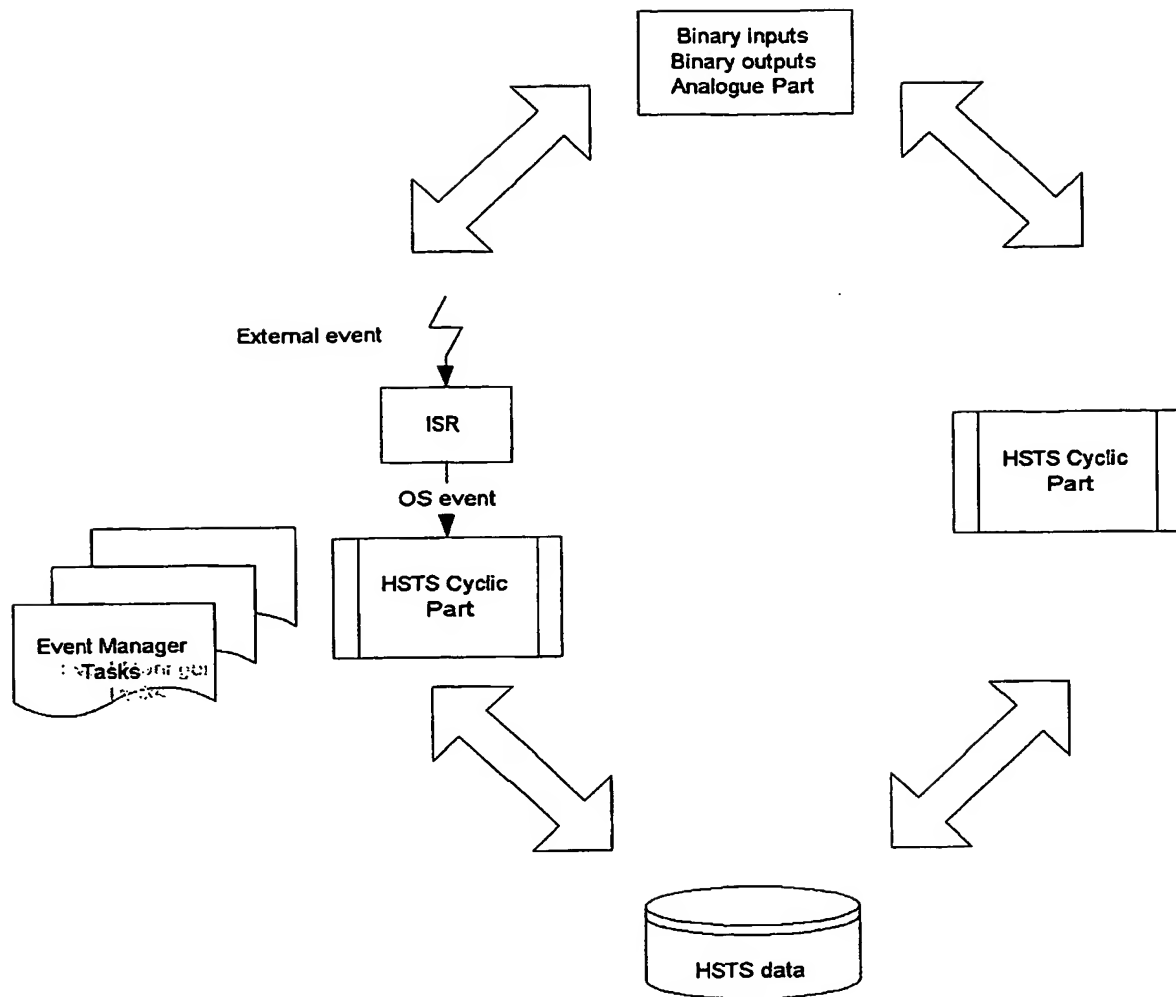


Figure 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/14889

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H02H7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 48284 A (BITRONICS) 17 August 2000 (2000-08-17) page 6, line 8 -page 22, line 14; figures 1-10	1,2,6,7
A	<p style="text-align: center;">---</p> GILBERT J G ET AL: "APPLICATION OF PROGRAMMABLE LOGIC CONTROLLERS TO SUBSTATION CONTROL AND PROTECTION" IEEE TRANSACTIONS ON POWER DELIVERY, IEEE INC. NEW YORK, US, vol. 9, no. 1, 1994, pages 384-393, XP000465644 ISSN: 0885-8977 <p style="text-align: center;">-----</p>	

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

13 May 2003

Date of mailing of the international search report

22/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Calarasanu, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/14889

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0048284	A	17-08-2000	US 6496342 B1 17-12-2002
		AU 2726200 A	29-08-2000
		EP 1151516 A1	07-11-2001
		WO 0048284 A1	17-08-2000
